


12310 SERIES

BRASS BALL VALVE FEMALE X FEMALE THREAD ISO 228/1 WITH BLUE IRON LEVER

NB: THE VALVES MES. 1/4" AND 3/8" ARE ISO THREADED 7/1 RP.

THE LEVER MUST BE MOUNTED ON THE BODY SIDE

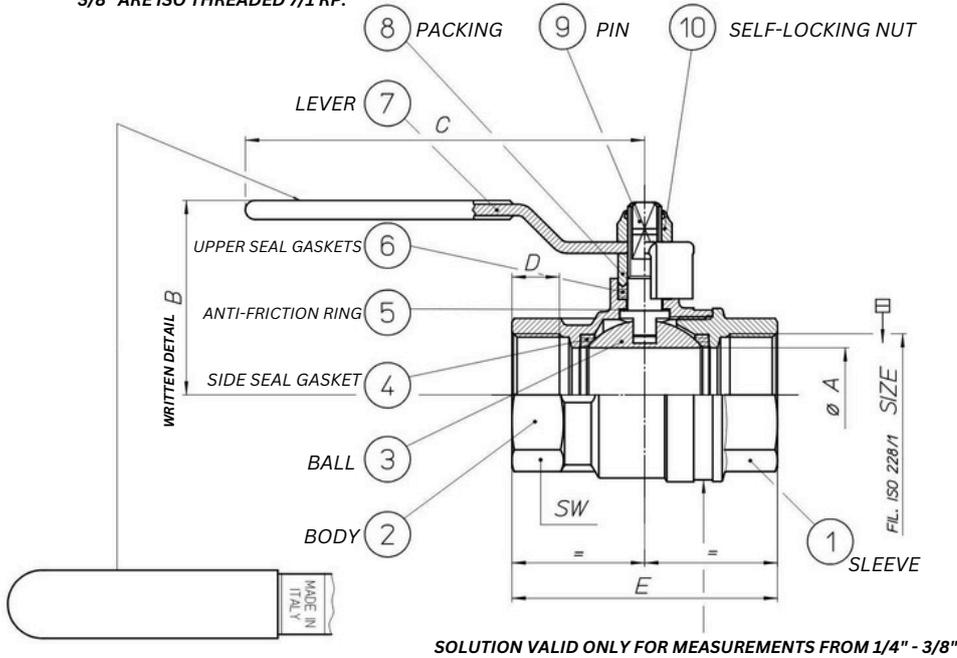

MADE IN ITALY

SPECIFICATION

NICKEL PLATED BRASS BODY WITH IRON LEVER
SIZES: 1/4"
CONNECTION: FEMALE X FEMALE NPT THREADED
90° LEVER ROTATION
PRESSURE:
1160 PSI
TEMPERATURE: -4° F TO 302° F
APPLICATION: HOT AND COLD WATER,
COMPRESSED AIR, OILS, FUELS, NON-AGGRESSIVE
FLUIDS
DIRECTION OF FLOW: IN BOTH WAYS

COMPONENTS

N°	DESCRIPTION	MATERIAL
1	SLEEVE	EGM.001
2	BODY	EGM.001
3	BALL	EGM.002
4	SIDE SEAL GASKET	EGM.009
5	ANTI-FRICTION RING	EGM.009
6	UPPER SEAL GASKETS	EGM.009
7	LEVER	EGM.007
8	PACKING	EGM.002
9	PIN	EGM.002
10	SELF-LOCKING NUT	EGM.020

DIMENSIONS

CODE	SIZE	DN	ØA ^{+0.15}	B	C	D	E	SW	PN	INCHES
12310-002	1/4"	0.31	0.39	1.49	3.54	0.43	1.87	17	80	